



by Honeywell

ILI95-E3 Series

Description

ILI95-MB-E3

The Intelligent Loop Interface-Main Board (ILI95-MB-E3) is the main interface for the E3 Series® product line. With its state-of-the-art 32 bit RISC processor, this compact “panel on a board” provides a powerful addition to Gamewell-FCI’s single pair conductor solutions. This intuitive design provides two (2), signaling line circuits, two (2), notification appliance circuits, local energy city box output, auxiliary relay functions, and auxiliary power output. These features, combined with built-in network and serial protocols, allow this module to support a host of new and existing products, resulting in a building block approach to fire alarm panel design.

The ILI95-MB-E3 is network ready and occupies sixty-four (64) nodes, operating at 625K baud. In addition, the Addressable Node Expander (ANX) board expands the network to one hundred and twenty-two (122) nodes. When this sub-assembly is integrated with proven Broadband components, the result is a flexible yet powerful integrated audio solution. When transmitting to remote locations, the optional RPT-E3 provides the ILI95-MB-E3 with valuable signal boosting and transient protection, as well as connectivity using both wire and fiber-optic cables.

The ILI95-MB-E3 provides two (2), signaling line circuits and terminals for the connections to up to (126) Apollo detectors and modules per SLC. The RS-485 interface can support up to a total of six (6) LCD-E3 and sixteen (16), ASM-16 and/or sixteen (16), ANU-48 remote LED driver modules.

The ILI95-MB-E3 relay outputs include system alarm, supervisory, and system trouble contacts. The ILI95-MB-E3 provides output for a local energy city master box or remote location which is non power-limited. All other wiring is power-limited.

E3 Series®, NetSOLO® and Velociti® are registered trademarks of Honeywell International Inc.

UL® is a registered trademark of Underwriters Laboratories Inc.

Intelligent Loop Interface-Main Board



ILI95-MB-E3

Features

ILI95-MB-E3 and ILI95-S-E3:

- Listed under UL® Standard 864, 9th Edition
- Network ready integral 625K baud ARCNET
- 115.2K baud RS-232
- Signaling line circuits with:
 - Two (2), Class A, Style 6, 7* or Class B, Style 4 circuits
 - 40 Character user-defined text per device
 - Capacity of 126 analog/addressable devices per loop
- 4100 event history log

*Style 7 wiring requires the use of XP95-LI Isolator Modules.

ILI95-MB-E3 Only:

- Two (2), notification appliance circuits, Class “A”, Style Z or Class B, Style Y rated at 2.0 amps. per circuit
- RS-485 supporting sixteen (16), ASM-16 switch modules and/or ANU-48 LED driver modules
- Alarm, trouble, and supervisory dry contacts Form “C”, rated at 2 amp. @ 30 VDC (resistive)
- Supports six (6), local/remote LCD-E3 annunciators and five (5), LCD-7100/RAN-7100 remote LED annunciators

An ISO 9001-2000 Company

SIGNALING



S1869



APPROVED



Approved



FDNY:
COA-#6077 7165-1703:0125

GAMEWELL-FCI


12 Clintonville Road, Northford, CT 06472-1610 USA • Tel: (203) 484-7161 • Fax: (203) 484-7118

Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.

©2011 by Honeywell International Inc. All rights reserved.

www.gamewell-fci.com

9021-60336 Rev. H page 1 of 2

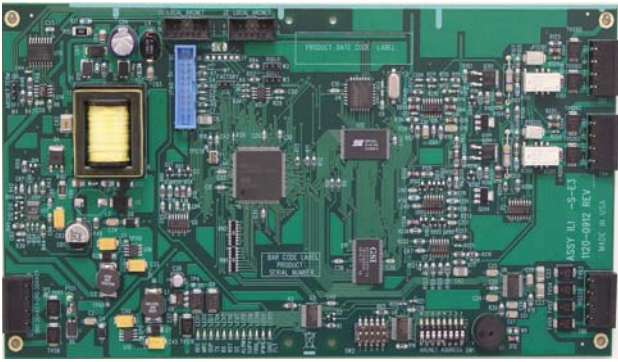

ILI95-S-E3

ILI95-S-E3

The Intelligent Loop Interface - Expansion Board (ILI95-S-E3) provides the E3 Series control panel with two (2), additional signaling line circuits. The layout is similar to the ILI95-MB-E3 except a number of components are omitted. The ILI95-S-E3 occupies one node on the Broadband network. The ILI95-S-E3 provides two (2), signaling line circuits and terminals for the connections to up to 126 sensors / modules.

Installation

Typically, the ILI95-MB-E3 or ILI95-S-E3 can be mounted in the following E3 Series cabinets:

- Cabinet B and D, backbox
- Cabinet B, B-Slim-E3 sub-assembly plate
- Cabinet C, E3-ILI-C sub-assembly plate
- Cabinet C, E3-INCC-C sub-assembly plate
- Cabinet C, E3-INX-C sub-assembly plate
- Cabinet D, E3-INCC-D sub-assembly plate
- Cabinet D, E3-INX-D sub-assembly plate

For installation instructions on the ILI95-MB-E3 or ILI95-S-E3, refer to the following documents:

- E3 Series® Expandable Emergency Evacuation Installation/Operation Manual, Part Number: 9000-0574
- ILI95-MB-E3 Installation Instructions, Part Number: 9001-0017
- ILI95-S-E3 Installation Instructions, Part Number: 9001-0018

For information on the ANX, refer to the Data Sheet Part Number: 9021-60497.

For additional information on the ILI-MB-E3 or ILI-S-E3, refer to the following document:

- ILI-E3 Series Data Sheet, Part Number: 9020-0605

Specifications

ILI95-MB-E3

Operating Current: 0.050 amp
Alarm Current: 0.091 amp max.

ILI95-S-E3

Operating Current: 0.109 amp
Alarm Current: 0.11 amp

ILI95-MB-E3 and ILI95-S-E3

Operating Voltage: 24 VDC FWR (from the PM-9/PM-9G Power Supply)

Operating Temperature: 32° to 120° F (0° to 49° C)

Relative Humidity: 0 to 93%, non-condensing at 90° F (32° C)

Supervised

Power-limited

SLC 40 Ohms maximum line impedance.
 0.5 µf maximum line capacitance.

Ordering Information

Part Number Description

ILI95-MB-E3 Intelligent Loop Interface-Main Board
ILI95-S-E3 Intelligent Loop Interface-Expansion Board

GAMEWELL-FCI