

by Honeywell

Description

The Gamewell-FCI, Model PTR-2 narrow carriage, 9-pin dot matrix printer is designed to function with the various Gamewell-FCI fire alarm control panels. This printer will furnish a printed record of all events occurring in the system. Small and compact, the PTR-2 printer is the ideal supplement to a Gamewell-FCI fire alarm system.

Installation

The PTR-2 is simple to install. The unit must be plugged into a local 120 VAC power source. A factory-furnished cable is plugged into the printer and the other end of the cable is plugged into the printer port of the Gamewell-FCI fire alarm control panel.

Note: The PTR-2 operates on 120 VAC only. For operation during a power failure, it is recommended that you use an uninterruptible power supply (UPS).

Paper Type


Max. Media Size: A4 (8.25 in x 11.7 in.)
 Media Type: Continuous forms, perforated plain paper, plain paper

Specifications

Input: 120 VAC, 60 Hz
Power: 90 watts (Operational)
 10 watts (Stand By)
I/F Type: RS-232C
Baud Rate:
 7100: 9,600 bits/second
 7200: 1,200 bits/second
Operating Temperature: 50° to 95° F (10° to 35° C)
Relative Humidity: 20 - 80%
Dimensions: 7.8" H x 16.8" W x 8.5"D
 (19.8 H x 42.7 W x 21.6 D cm)
Weight: 10.8 lbs. (4.9 kg)

E3 Series[®] is a registered trademark of Honeywell International Inc.
 Microsoft[®] is a registered trademark of Microsoft Corporation.

Dot Matrix Printer

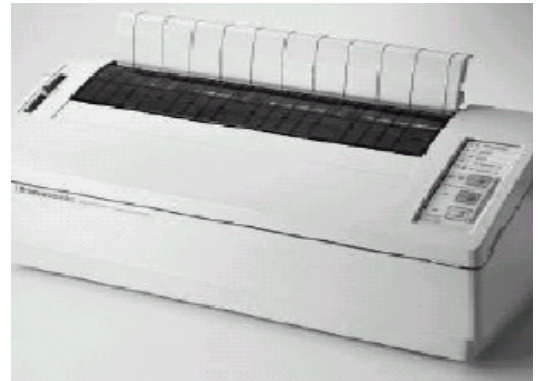

PTR-2

Features

- Supervised operation
- High speed printing
- Compact Design
- Correspondence quality print
- Simple installation
- Reduced noise level
- Ergonomic design

Ordering Information

| Part Number | Description |
|-------------|--------------------|
| PTR-2 | Dot Matrix Printer |

GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472-1610 USA • Tel: (203) 484-7161 • Fax: (203) 484-7118

Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.