

by Honeywell

Description

The ASM-16 Addressable Switch Module is a component of NetSOLO® and E3 Series® fire alarm and voice evacuation systems. It serves as the point of interface between an operator and the system's audio evacuation, fire fighter intercom, and building control circuits.

The ASM-16 is a configurable switch input sub-assembly with sixteen (16), switches and forty-eight (48), status LEDs and may be remotely located via the RS-485 serial interface. Each ASM-16 addressable switch module has sixteen (16), push-button switches that can be programmed to serve any function the application demands.

An ASM-16 switch can be programmed as a speaker circuit switch, fire fighter phone switch, an auxiliary control switch using a bank of three (3), switches (one switch each for on-off-auto functions), or switches with custom defined functions (e.g. system reset, system silence, system acknowledge, all-call, phone patch, lamp test, alarm tone on, manual select, etc.).

Each ASM-16 switch also has three (3), fully programmable LEDs in red, yellow, and green. These LEDs can be programmed to work in concert with their associated push-button switch or they can be made to work independently as status indicators (e.g. on, off, normal, etc.).


An INI-VGC assembly or ILI-MB-E3 can accommodate up to sixteen (16), ASM-16 modules for a total of 256 switches and 768 LEDs.

Specifications

Operating Voltage:	24 VDC (nominal) (from PM-9 power supply)
Operating Current:	0.011 amp. (with no LEDs lit)
Operating Temperature:	32° to 120° F (0° to 49° C)
Relative Humidity:	0 to 93% (non-condensing) at 90° F (32° C)

E3 Series® and NetSOLO® are registered trademarks of Honeywell International Inc.

ASM-16 Addressable Switch Module

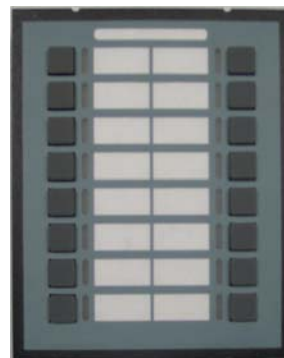

Front View



Rear View

Features

- Listed under UL Standard 864, 9th Edition
- Each INI-VGC supports up to sixteen (16), ASM-16 switch modules for a total of 256 switches
- Each ILI-MB-E3 supports up to sixteen (16), ASM-16 switch modules for a total of 256 switches
- Each ASM-16 switch has three (3), fully programmable status, indicating LEDs: red, yellow, and green
- All switch functions are fully software programmable
- Slip-in label inserts allow easily modified switch designations

Ordering Information

Model	Description
ASM-16	Programmable switch module

An ISO 9000-2000 Company



GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472-1610 USA • Tel: (203) 484-7161 • Fax: (203) 484-7118

Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.

©2007 by Honeywell International Inc. All rights reserved.

www.gamewell-fci.com

9020-0554 Rev. i page 1 of 1