

by Honeywell

## Description

The ASM-16 Addressable Switch Module is a component of NetSOLO<sup>®</sup> and E3 Series<sup>®</sup> fire alarm and voice evacuation systems. It serves as the point of interface between an operator and the system's audio evacuation, fire fighter intercom, and building control circuits.

The ASM-16 is a configurable switch input sub-assembly with sixteen (16), switches and forty-eight (48), status LEDs and may be remotely located via the RS-485 serial interface. Each ASM-16 addressable switch module has sixteen (16), push-button switches that can be programmed to serve any function the application demands.

An ASM-16 switch can be programmed as a speaker circuit switch, fire fighter phone switch, an auxiliary control switch using a bank of two (2), switches (one switch each for on-off-auto functions), or switches with custom defined functions (e.g. system reset, system silence, system acknowledge, all-call, phone patch, lamp test, alarm tone on, manual select, etc.).

Each ASM-16 switch also has three (3), fully programmable LEDs in red, yellow, and green. These LEDs can be programmed to work in concert with their associated push-button switch or they can be made to work independently as status indicators (e.g. on, off, normal, etc.).


An INI-VGC assembly or ILI-MB-E3/ILI95-MB-E3 can accommodate up to sixteen (16), ASM-16 modules for a total of 256 switches and 768 LEDs.

## Specifications

<b>Operating Voltage:</b>	24 VDC (nominal) (from the PM-9/PM-9G power supply)
<b>Operating Current:</b>	0.011 amp. (with no LEDs lit)
<b>Operating Temperature:</b>	32° to 120° F (0° to 49° C)
<b>Relative Humidity:</b>	0 to 93% (non-condensing) at 90° F (32° C)

E3 Series<sup>®</sup> and NetSOLO<sup>®</sup> are registered trademarks of Honeywell International Inc.  
UL<sup>®</sup> is a registered trademark of Underwriters Laboratories Inc.

## ASM-16 Addressable Switch Module

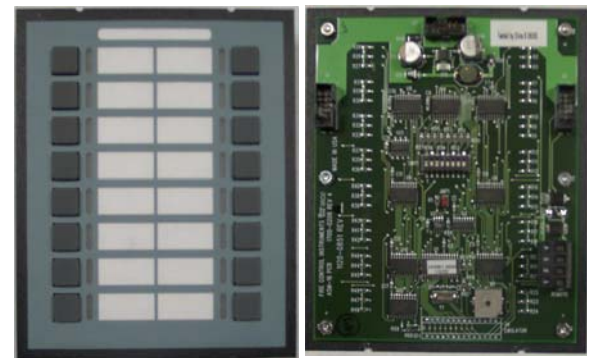

Front View

Rear View

## Features

- Listed under UL<sup>®</sup> Standard 864, 9th Edition
- Each INI-VGC supports up to sixteen (16), ASM-16 switch modules for a total of 256 switches
- Each ILI-MB-E3/ILI95-MB-E3 supports up to sixteen (16), ASM-16 switch modules for a total of 256 switches
- Each ASM-16 switch has three (3), fully programmable status, indicating LEDs: red, yellow, and green
- All switch functions are fully software programmable
- Slip-in label inserts allow easily modified switch designations

## Ordering Information

Part Number	Description
ASM-16	Programmable switch module

### An ISO 9001-2000 Company

SIGNALING



### GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472-1610 USA • Tel: (203) 484-7161 • Fax: (203) 484-7118

Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.

©2011 by Honeywell International Inc. All rights reserved.

[www.gamewell-fci.com](http://www.gamewell-fci.com)

9020-0554 Rev. M page 1 of 1