

by Honeywell

Description

The ARCNET Repeater Module (RPT-E3) is an optional component of the E3 Series® Expandable Emergency Evacuation System. It allows the following removable, E3 Series sub-assemblies to connect to the Broadband network from remote locations:

- ILI-MB-E3/ILI95-MB-E3
- ANX-SR/ANX-MR-UTP/ANX-MR-FO
- NGA

The RPT-E3 is available for use in two versions:

- RPT-E3-FO
- RPT-E3-UTP

The RPT-E3-UTP connects to the network using unshielded, twisted-pair, copper wire only.

The RPT-E3-FO communicates to the network using either 62.5/125 multi-mode fiber-optic cable or copper, unshielded, twisted-pair wire.

Installation

The RPT-E3 is adaptable for an installation in the standard E3 Series System cabinets. Typically, the RPT-E3 module is mounted on standoffs on top of the right side of the ILI-MB-E3/ILI95-MB-E3/ANX modules. The units can be easily connected to the backbox or the sub-assembly plate depending on the cabinet model.

For instructions on installing the RPT-E3, refer to the E3 Series® Expandable Emergency Evacuation Installation/Operation Manual, Part Number: 9000-0574 or the RPT-E3 Installation Instructions, Part Number: 9000-0580.


Specifications

Operating Voltage:	24 VDC FWR (from the PM-9/PM-9G power supply)
Operating Current:	0.013 amp
Operating Temperature:	32° to 120° F (0° to 49° C)
Relative Humidity:	0 to 93%, non-condensing at 90° F (32° C)

E3 Series® and NetSOLO® are registered trademarks of Honeywell International Inc.

UL® is a registered trademark of Underwriters Laboratories Inc.

Network Repeater

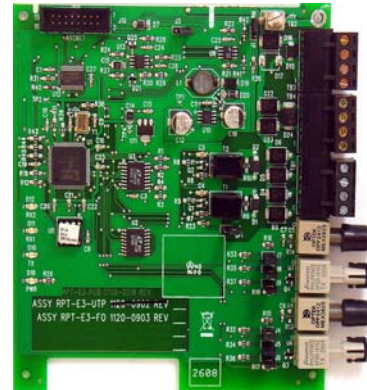

RPT-E3


Features

- Listed under UL® Standard 864, 9th Edition
- Provides the capability for removable E3 Series sub-assemblies to connect in Styles 4 or 7 configurations
- “FO” option allows either 62.5/125 fiber-optic cable or copper, unshielded, twisted-pair wire
- “UTP” option available for unshielded, twisted-pair copper wire only
- 625K baud ARCNET Repeater

Ordering Information

Part Number **Description**

RPT-E3-UTP	Network Repeaters, unshielded, twisted-pair
RPT-E3-FO	Network Repeater, fiber-optic

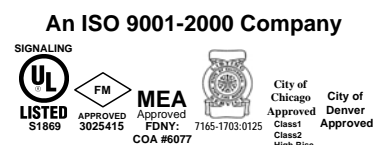

GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472-1610 USA • Tel: (203) 484-7161 • Fax: (203) 484-7118

Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.

©2011 by Honeywell International Inc. All rights reserved.

www.gamewell-fci.com

9020-0609 Rev. I page 1 of 1