

by Honeywell

Description

The Gamewell-FCI, HPFF8 is a Notification Appliance Circuit (NAC) expansion panel designed to extend the power capabilities of existing NACs and provide power for auxiliary devices. The HPFF8 connects to any 12 or 24V Fire Alarm Control Panel (FACP) or stand alone.

Available in 8.0 amps, they provide regulated and filtered 24VDC power to each of the four NACs and an auxiliary output. The NAC outputs are rated at 3.0 amps each (the total output cannot exceed 8.0 amps). The auxiliary output is rated at 2.0 amps. This output is continuously supplied, even in alarm, and therefore must be taken into account for power supply loading and battery size calculations.

The NAC outputs may be configured as any of the following:


- Four Class B (Style Y)
- Two Class A (Style Z)
- Two Class B and one Class A
- Four Class A with the optional HPP31076 Class A adapter installed

These power supplies contain an internal Battery charger capable of charging up to 26.0 amp-hour (AH) batteries.

The HPFF8 can be mounted in lockable wall cabinet units that can accommodate up to two, 18AH batteries. A multi-pack option allows for up to four, chassis mount units installed in a single lockable CAB-4 Series equipment enclosure. These chassis mount units have a "CM" suffix, HPFF8CM and can accommodate two, 12AH batteries. Power supplies are available in either 120VAC/60 Hz or 240VAC/50 Hz.

One of the most challenging aspects of a retrofit application is locating the existing End-of-Line (EOL) resistor. In these applications that have EOL values, other than the 3.9k normally used with the HPFF8, a single resistor matching the existing EOL can be used as a reference for all the outputs. This feature speeds the installation and the system checkout, because the actual EOL does not need to be located and changed in the circuit. The reference resistor must be within the range of 1.9k to 25k.

NAC Expander/Power Supply

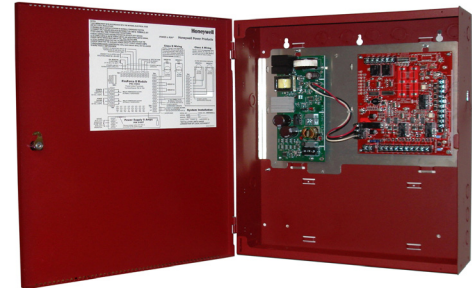

HPFF8

Features

- Four (4) supervised notification application circuits (NACs) capable of supplying +24VDC at 3.0 amp maximum each
- NAC output circuits may be configured as any of the following:
 - Four Class B (Style Y)
 - Two Class B & one Class A
 - Two Class A (Style Z)
 - Four Class A with the optional HPP31076 Class A adapter installed
- Four field-programmable operational modes
- 2.0 amp auxiliary continuously supplied output
- Two fully supervised input/output control circuits
- Temporal coding and sync protocols compatible with the following notification appliance brands:
 - System Sensor
 - Faraday
 - Gamewell
 - Amseco
 - Cooper-Wheelock
 - Gentex
- Supervised AC input, battery voltage, auxiliary output, charger, and earth ground faults
- Trouble indication for supervision of the following:
 - NAC circuits
 - Auxiliary output
 - AC input
 - Charger
 - Battery voltage
 - Open contacts in the initiating device signal inputs (for FACP trouble notification)
 - Earth ground faults by individual status LED's
- Separate Trouble and AC Fail Form-C relay Contacts

An ISO 9000-2000 Company



E3 Series[®] is a registered trademark of Honeywell International Inc.

GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472-1610 USA • Tel: (203) 484-7161 • Fax: (203) 484-7118

Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.

©2009 by Honeywell International Inc. All rights reserved.

www.gamewell-fci.com

9021-60521 Rev. A page 1 of 2

Features (Continued)

- The Trouble Form-C relay contacts selectable for immediate or a 2 hour delay with AC failure
- 26 AH battery charger capability; wall cabinet supports two 12V 18AH batteries, while the multi-pack equipment cabinets supports two 12V 12AH batteries.
- NAC Overload protection and indication
- Multi-pack units (CM suffix) offer up to four chassis mount units in the CAB-4 Series
- Wall mount units can be configured to internally house the following:
 - one AOM-2SF single control module
 - one AOM-2R single relay module

Specifications

Primary Input Power:	120VAC, 60Hz, 3.0A or 220VAC, 50Hz, 1.5A
Secondary Power:	24 volt operation: two (2), 7-24 AH batteries
Battery Charging Capacity:	Up to 26 AH batteries mounted
Battery Space:	
HPFF8 Cabinet:	Up to two 12AH batteries
CAB-4:	Up to two 12AH batteries per supply
Total Output Power:	8.0A max
Standby Current:	0.030 A
Auxiliary Power Output:	0.15A under all conditions 2.0A if load is removed during operation (external relay or AC Fail Relay is required)

Specifications (Continued)

NAC Output Ratings:	24VDC fully regulated, 3.0A max per circuit (8.0A total)
End-of-Line Resistor Range:	2K to 25k ohm, ½ watt
Common Trouble Relay/AC Fail Relay:	2.0A at 28VDC or 120VAC
Input Control Circuit:	16-30VDC @ 5mA min.
Temperature Rating:	32°F to 120°F (0°C to 49°C)
Relative Humidity:	10% to 93% non-condensing
Cabinet Dimensions:	
HPFF8 Cabinet:	16.65" W x 19.0" H x 5.2" D (42.29 W x 48.26 H 13.23 D cm)
CAB-4 Cabinet:	24" W x 45.9" H x 5.15" D (60.96 W x 116.52 H x 13.1D cm)

Ordering Information

Part Number	Description
HPFF8	8A fire rated power supply operating at 120VAC/60 Hz. Unit includes red enclosure
HPFF8CM	8A fire rated power supply - chassis mounted operating at 120VAC/60 Hz. Unit includes mounting hardware for installation in CAB-4 or D-Size enclosure
HPFF8E	8A fire rated power supply operating at 240VAC/50 Hz
HPFF8CME	8A fire rated power supply chassis mounted operating at 240VAC, 50 Hz
HPP31076	Class A (Style Z) NAC module
EQDR-D4	CAB-4 door
SBB-D4	CAB-4 backbox

GAMEWELL-FCI