

by Honeywell

## Description

The ARCNET Repeater Module (RPT-E3) is an optional component of the E3 Series<sup>®</sup> Expandable Emergency Evacuation System. It allows the following remountable, E3 Series sub-assemblies to connect to the Broadband network from remote locations:

- ILI-MB-E3
- NGA

The RPT-E3 is available for use in two versions:

- RPT-E3-FO
- RPT-E3-UTP

RPT-E3-UTP connects to the network using unshielded, twisted-pair, copper wire only.

RPT-E3-FO communicates to the network using either 62.5/125 multi-mode fiber-optic cable or copper, unshielded, twisted-pair wire.

## Installation

The RPT-E3 is adaptable for installation in standard E3 Series System cabinets. Typically, the RPT-E3 module is mounted on standoffs on top of the right side of the ILI-MB-E3 module. Either unit can be easily connected to the backbox or sub-assembly plate depending on the cabinet model.


For instructions on installing the RPT-E3, refer to the E3 Series<sup>®</sup> Expandable Emergency Evacuation Installation/Operating Manual, Part Number: 9000-0574 or the RPT-E3 Installation Instructions, Part Number: 9000-0580.

## Specifications

<b>Operating Voltage:</b>	24 VDC FWR (from PM-9 power supply)
<b>Operating Current:</b>	0.013 amp.
<b>Operating Temperature:</b>	32° to 120° F (0° to 49° C)
<b>Relative Humidity:</b>	0 to 93%, non-condensing at 90° F (32° C)

E3 Series<sup>®</sup> and NetSOLO<sup>®</sup> are registered trademarks of Honeywell International Inc.

## Network Repeater

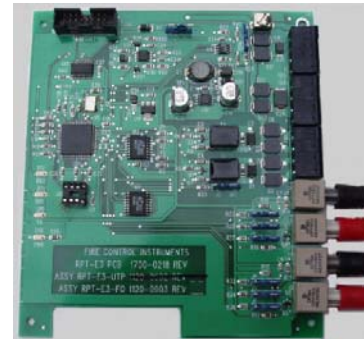

RPT-E3

## Features

- Listed under UL Standard 864, 9th Edition
- Provides the capability for remountable E3 Series sub-assemblies to connect in Styles 4 or 7 configurations
- “FO” option allows either 62.5/125 fiber-optic cable or copper, unshielded, twisted-pair wire
- “UTP” option available for unshielded, twisted-pair copper wire only
- 625K baud ARCNET Repeater

## Ordering Information

Model	Description
RPT-E3-UTP	Network Repeaters, unshielded, twisted-pair
RPT-E3-FO	Network Repeater, fiber-optic

An ISO 9000-2000 Company

SIGNALING



S1869



APPROVED



Approved

231-06-E



7165-0694:268

7165-0694:269

City of  
Chicago  
Approved  
Class 1  
Class 2

City of  
Denver  
Approved

### GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472-1610 USA • Tel: (203) 484-7161 • Fax: (203) 484-7118

Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.

©2007 by Honeywell International Inc. All rights reserved.

[www.gamewell-fci.com](http://www.gamewell-fci.com)

9020-0609 Rev. e1 page 1 of 1